



# HS-S-15-250-V

Montagestange  
 Mounting rod  
 Tige de montage



di-soric GmbH & Co. KG  
 Steinbeisstraße 6  
 DE-73660 Urbach  
 Germany  
 Tel: +49 (0) 7181/9879-0  
 info@di-soric.com · www.di-soric.com

209460

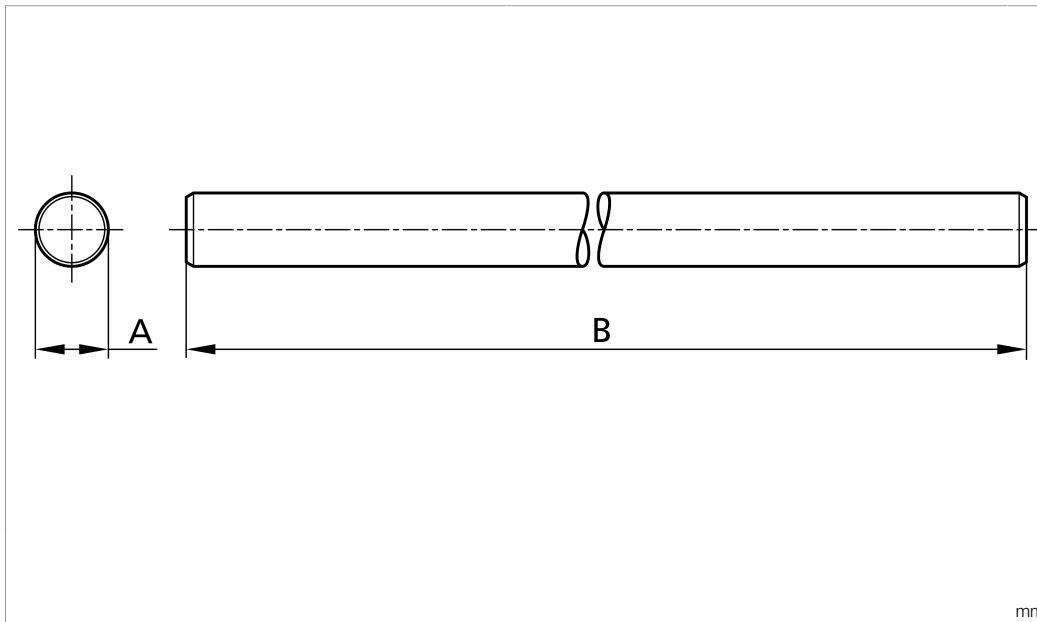


| Technische Daten              | Technical data                 | Caractéristiques techniques        | +20°C  |
|-------------------------------|--------------------------------|------------------------------------|--|
| Produktserie                  | Product series                 | Gamme de produits                  | Z-UBT-KL-MS Montagesystem / Z-UBT-KL-MS Assembly system / Système de montage Z-UBT-KL-MS |
| Durchm. Montagezapfen/Bohrung | Diameter Mounting pin / boring | Diam. tourillon de montage/alésage | Ø 15 mm  |
| Maß B                         | Dimension B                    | Dimension B                        | 250 mm   |
| Material                      | Material                       | Matériau                           | Edelstahl / Stainless steel / Acier inoxydable   |

Stand 16.07.24, Änderungen vorbehalten  
 As of 07/16/24, subject to change  
 État 16.07.24, sous réserve de modifications




**HS-S-15-250-V**

装配杆



di-soric GmbH & Co. KG  
Steinbeisstraße 6  
DE-73660 Urbach  
Germany  
Tel: +49 (0) 7181/9879-0  
info@di-soric.com · www.di-soric.com

209460

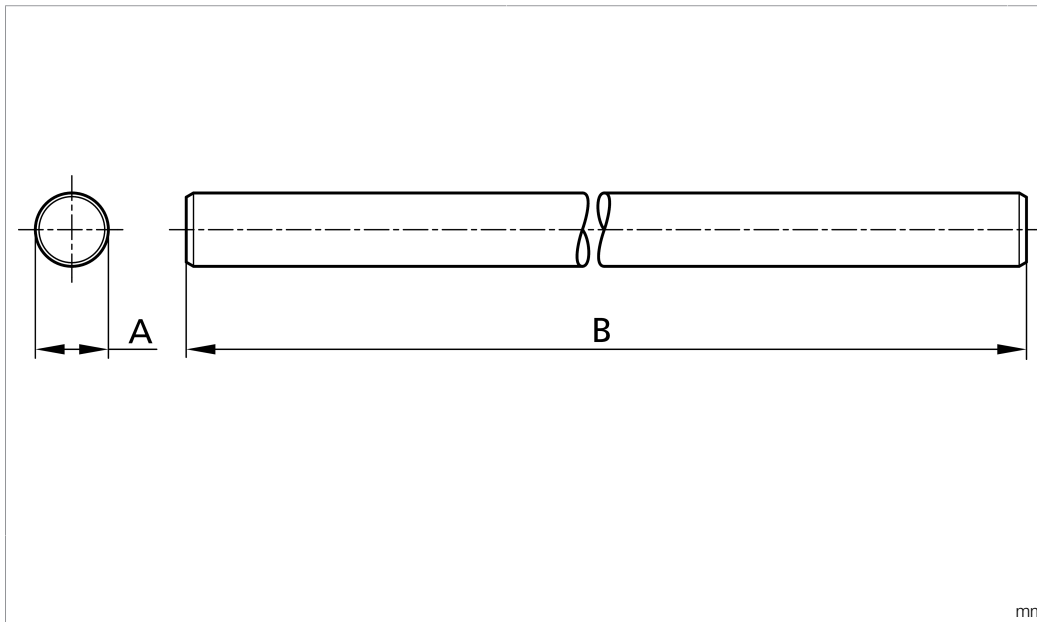

**技术数据**

产品系列

直径装配栓/钻孔

尺寸 B

材料

**+20°C**

Z-UBT-KL-MS 安装系统

Ø 15 mm

250 mm

不锈钢

版本 24.07.16, 保留变更权



# Systemhalter Serie HS

Grundhalter Ø 15 mm

# System holder series HS

Basic system holder Ø 15 mm

# Systèmes de fixation Série HS

15 mm du support Ø de système de base

