


201104
MK-Z-12/4
Plug connector

- Metal/plastic housing
- Turnable metal thread
- Quick mounting without tools
- 4-pin
- High protection type

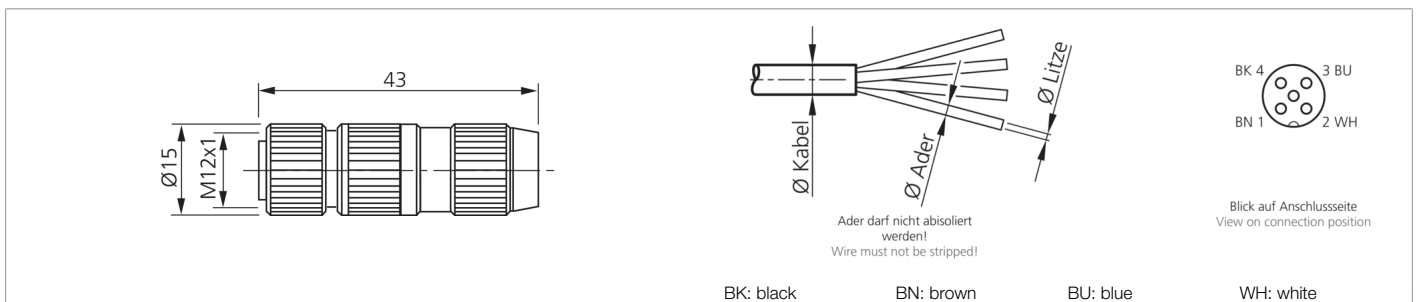

Function											CE	UK CA		

Technical data (typ.)		+20°C, 24 V DC	
Service voltage		32 V DC	
Housing material		Metal / Plastic	
For Ø cable		2.9 ... 5.1 mm	
For Ø wire		1.0 ... 1.6 mm (Wire must not be stripped!)	
For strand cross-section		0.14 ... 0.34 mm ²	
Design		straight	
Ambient temperature during operation		-25 ... +85 °C	
Protection type		IP 67	
Sensor-side connection		Socket, M12 x 1, 4-pin	
Control-side connection		Field-wireable, Insulation displacement connectors	
More information / accessories		https://www.di-soric.com/201104	