




201730
TKH-W-5
Connection cable

- Drag chain compatible
- With click-stop device
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

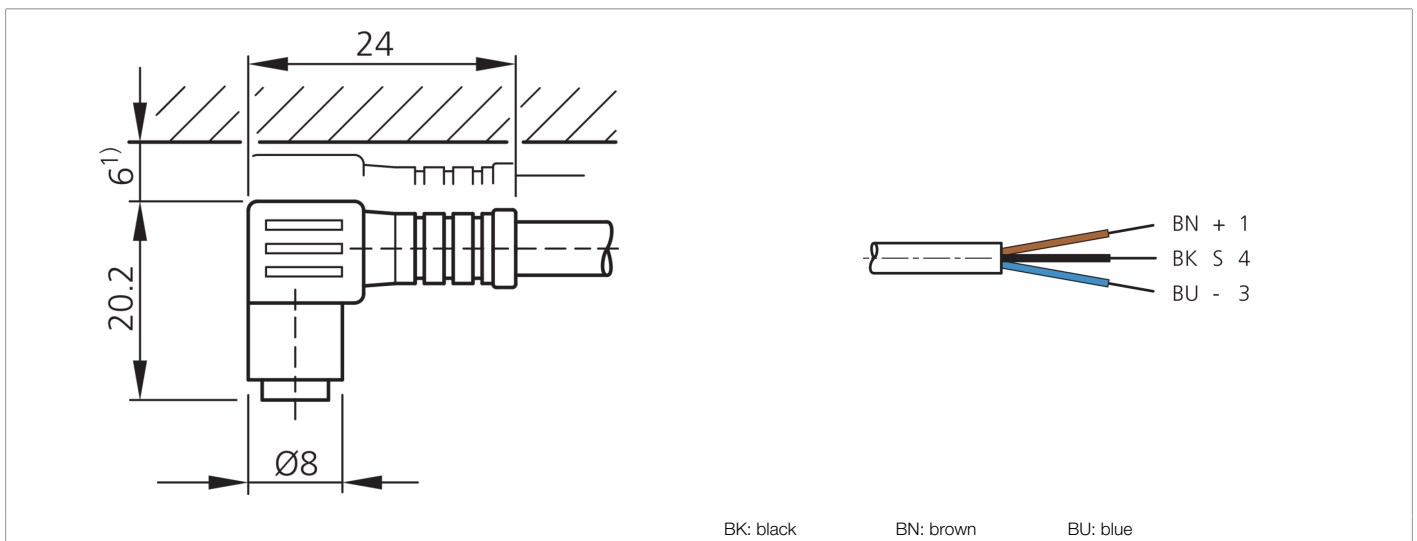

Function												
												  

Technical data (typ.)	
Service voltage	50 V AC / 60 V DC
Length	5,000 mm
Diameter	Ø 4.1 mm (Diameter)
Material of cable	Polyurethane
Drag chain properties	41 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Angled / open cable end
Characteristics	Click-stop device for thread M8
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65
Connection	Click-stop device, M8, 3-pin, A-coded
Cross-section	0.25 mm ² (3 x)

More information / accessories	https://www.di-soric.com/201730
--------------------------------	---