




202852
VKHM-Z/VSM-Z/U
Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

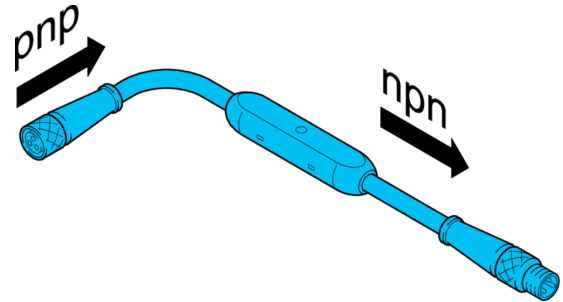

4 BK
BU 3 **1 BN**
n.c.
 Kupplung
 Coupling
 M12

BK 4 **3 BU**
BN 1 **n.c.**
 Stecker
 Connector
 M12

1) Potentiometer (only ...TSM-Z/T) 3) LED SWITCHING OUTPUT
 2) LED STATUS

BK: black BN: brown BU: blue

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Thread	M12 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Evaluation	pnp -> npn converter
Application	Digital signal
Function selection	pnp
Switching output	nnp
Switching frequency	5000 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M12, 3-pin
Connection 2	Pigtail, Connector, M12, 3-pin

More information / accessories <https://www.di-soric.com/202852>