



202925
ORSD 20 P2K-IBS
Ring light barrier

- Compact design
- High resolution
- Static/dynamic switchable
- Pulse stretching adjustable
- Detecting metal and non-metal parts

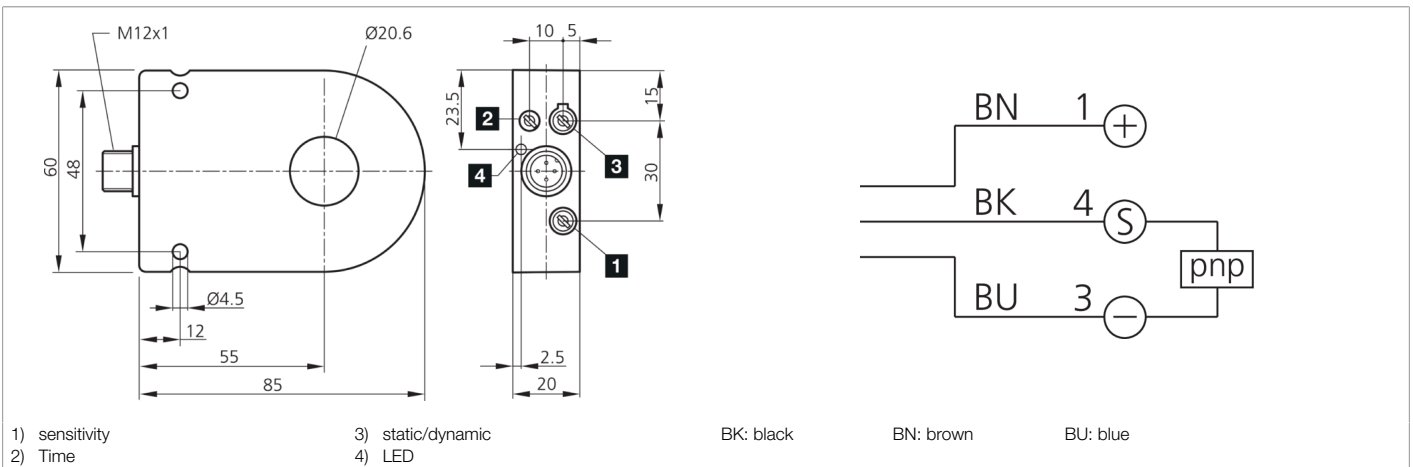

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA
Service voltage	10 ... 35 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Internal diameter	20.6 mm
Housing material	Plastic (PA, chromium-plated)
Protection class	III, operation on protective low voltage
Operating principle	Optical
Evaluation	Dynamic/static switchable
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Pulse stretching	0.1 ... 150 ms adjustable
Light source	LED
Color	Infrared
Modulation	Clocked
Ambient light immunity	5 kLx
Resolution	Ø 1.5 mm
Sensitivity adjustment	Potentiometer
Response time	0.10 ms
Ambient temperature during operation	0 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 3-pin

 **202925**
ORSD 20 P2K-IBS
Ring light barrier

Technical data (typ.)

Connection cable

+20°C, 24 V DC

VK ...

More information / accessories

<https://www.di-soric.com/202925>