202991
MK-Z-8/4/0.14
Plug connector

- Metal/plastic housing
- Turnable metal thread
- Quick mounting without tools
- 4-pin
- High protection type of up to IP 67

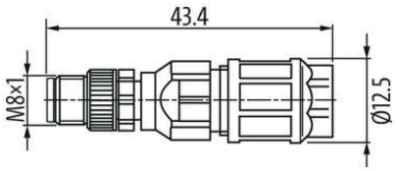



Ader darf nicht abisoliert werden!
Wire must not be stripped!

Blick auf Anschlussseite
View on connection position

BK: black BN: brown BU: blue WH: white

Function

Technical data (typ.)	+20°C, 24 V DC
Service voltage	32 V DC
Housing material	Metal / Plastic
For Ø cable	2.5 … 5.1 mm
For Ø wire	1.0 … 1.6 mm (Wire must not be stripped!)
For strand cross-section	0.14 … 0.34 mm²
Design	straight
Ambient temperature during operation	-25 … +85 °C
Protection type	IP 67
Sensor-side connection	Socket, M8 x 1, 4-pin
Control-side connection	Field-wireable, Insulation displacement connectors

More information / accessories	https://www.di-soric.com/202991

© di-soric . Right to change reserved