




**203403**  
**IRD 50 PSOK-IBS**  
**Inductive ring sensor**

- High resolution
- Short response time
- Sensitivity and pulse stretching adjustable
- Resistant to dirt
- Dynamic operating principle
- Metal connector
- High protection type

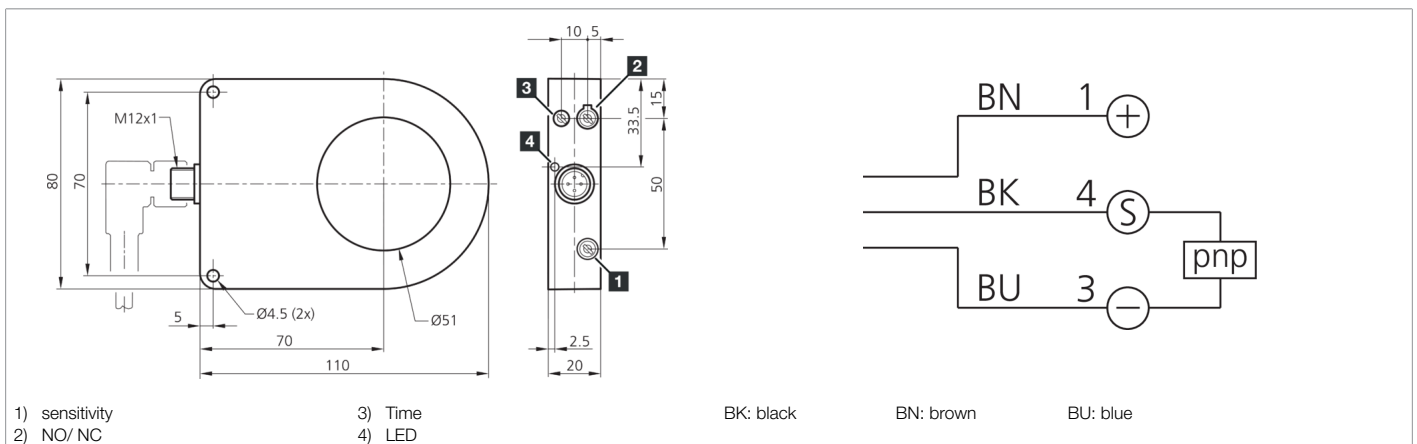

Function													

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	20 mA
Insulation voltage endurance	1000 V
Internal diameter	51 mm
Assembly distance to metal (min.)	10 mm
Housing material	Plastic (PA)
Material	POM (Ring)
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	inductive
Evaluation	Dynamic
Switching output	pnp, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Pulse stretching	0.1 ... 150 ms adjustable
Resolution	Ø 2.5 mm
Sensitivity adjustment	Potentiometer
Speed of parts (max.)	25 m/s
Speed of parts (min.)	0.1 m/s
Response time	0.20 ms
Release time	0.20 ms
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin, A-coded



203403

IRD 50 PSOK-IBS

Inductive ring sensor

**Technical data (typ.)**

+20°C, 24 V DC

Connection cable

VK ...

**More information / accessories**

<https://www.di-soric.com/203403>