



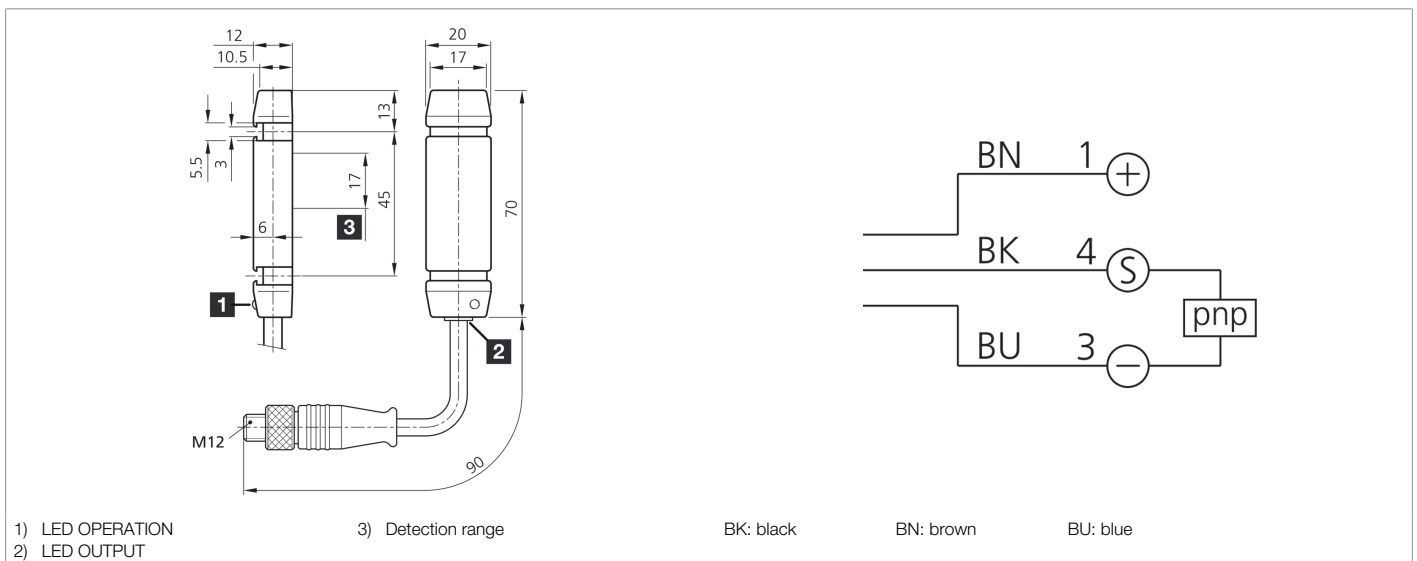


203764
MS 70 PSL-K-BS
Magnetic field sensor

- Detection of current flow in welding cables
- Compact design
- Low weight
- Cable with plug connector M12
- Slot for quick mounting

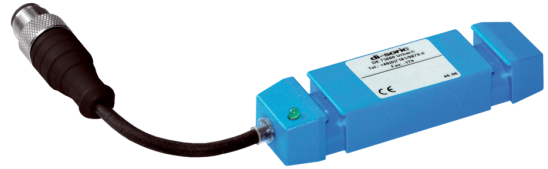

Function										
										 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Activation field	5 mT
Field type	AC/DC, frequency afflicted
Insulation voltage endurance	500 V
Housing material	Plastic (PC)
Protection class	III, operation on protective low voltage
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Pulse stretching	150 ms
Display	LED yellow - Output signal
Response time	0.06 ms
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M12, 3-pin
Connection cable	VK ...

More information / accessories <https://www.di-soric.com/203764>