203769
MZET 28 PSK-K-IBS
Cylinder sensor

- To be inserted from above
- Metal casing
- Mechanically weld-proof
- Fully electronic
- High reproducibility

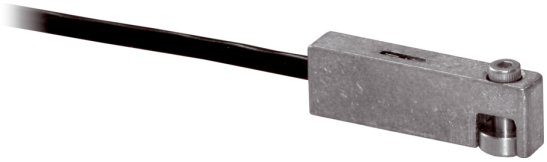

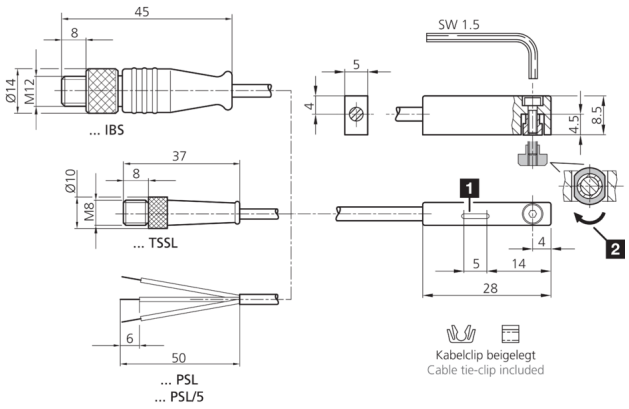

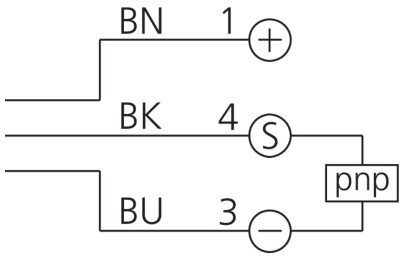

1) LED 2) Fastening excentric BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof, polarity-safe
Service voltage	10 … 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Cylinder groove	T-groove, Can be inserted into the groove from above
Mounting	Locknut (Allen screw SW 1.5 mm)
Housing material	Die-cast zinc
Material of cable	Polyurethane
Protection class	III, operation on protective low voltage
Switching output	pnp, 200 mA, NO, short-circuit-proof
Voltage drop (max.)	2 V
Reproducibility	< 0.1 mm
Display	LED yellow - Output signal
Switching frequency	1000 Hz
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 68 (Device and cable) / IP 67 (Connection plug)
Connection	Pigtail, 0.3 m, M12, 3-pin
Connection cable	VK …

More information / accessories	https://www.di-soric.com/203769

© di-soric . Right to change reserved