




204383
AV2-UND/ODER-PS-TS
Connection distributor

- Suitable for all standard sensors
- Switching function AND/OR switchable
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- High protection type

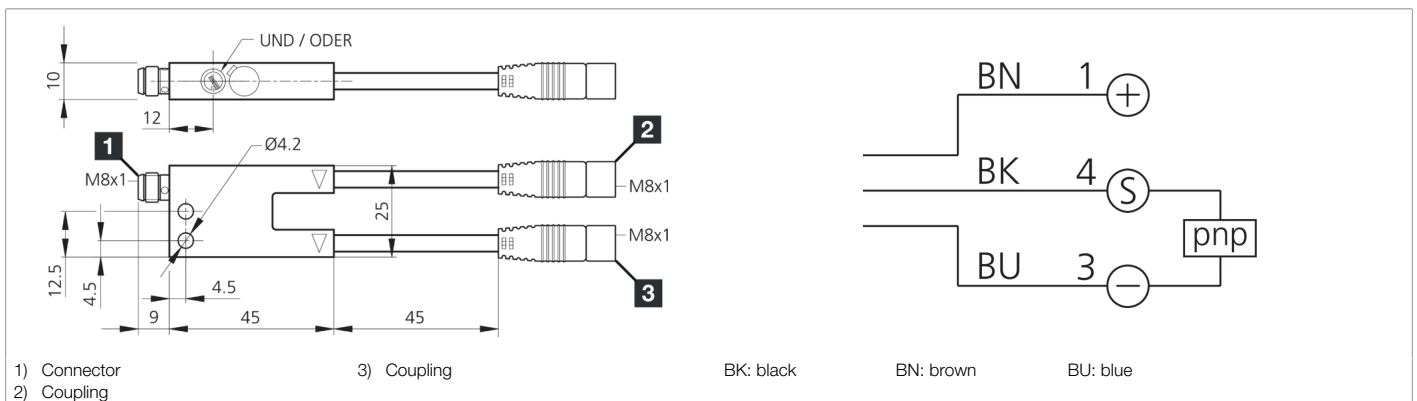

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	14 mA
Housing material	Die-cast zinc (Black, painted)
Protection class	III, operation on protective low voltage
Evaluation	AND/OR
Switching output	pnp, 200 mA, AND/OR
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection 2	Pigtail, Socket, M8, 3-pin (2x)

More information / accessories	https://www.di-soric.com/204383
--------------------------------	-------------------------------------------------------------------------------