




**205679**  
**BE 1-A130-G3-K-BS**  
**Barlight**

- Very compact design
- Homogeneous luminous field
- Cable outlet usable at the front or back side
- Universal mounting options
- Metal casing
- Homogeneous illumination
- High efficiency
- Robust metal housing

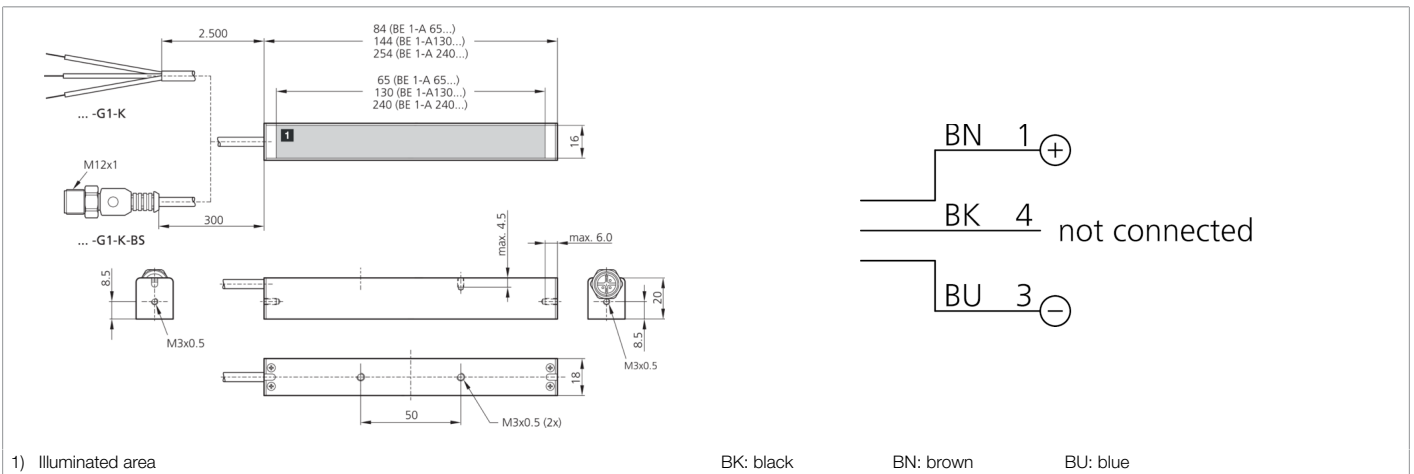

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	190 mA (24 V DC)
Power	4.5 W (24 V DC)
Illuminated area	130 x 16 mm
Housing dimensions	16 x 20 x 144 mm
Housing material	Aluminum (Black, Anodized)
Material	Polyurethane (Cable)
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Risk group 1
Approvals	UL
Design	Barlight
Light source	LED
Color	Blue
Wavelength	465 nm
Deflection angle FWHM	30°
Light intensity	<ul style="list-style-type: none"> <li>■ 5.50 kLx (100.0 mm)</li> <li>■ 2.00 kLx (200.0 mm)</li> <li>■ 4.00 kLx (500.0 mm)</li> </ul>
Control	without power control
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 20
Connection	Pigtail, 0.3 m, M12, 3-pin
Connection cable	VK ...



**205679**  
**BE 1-A130-G3-K-BS**  
**Barlight**

[More information / accessories](#)

<https://www.di-soric.com/205679>