





- Shielded
- Cable material made of PVC for applications in wet rooms or under water
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

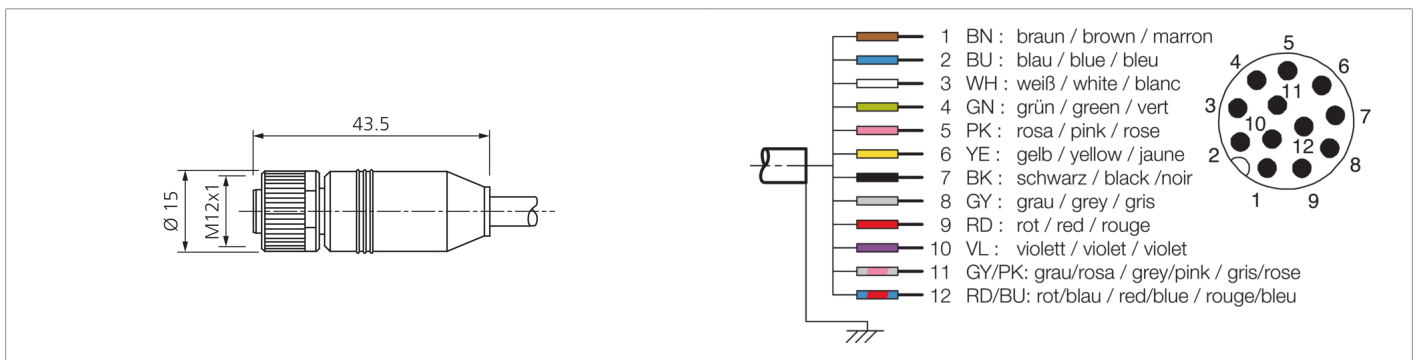

Function										
										  

Technical data (typ.)	
Service voltage	< 30 V AC/DC
Length	10,000 mm
Diameter	Ø 6.5 mm (Diameter)
Thread	M12
Material of cable	PVC
Component	Connection cable
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
To be used for	CS 50 Vision Sensors, CS 60 Vision Sensors
LED Anzeige	No
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67
Connection	Socket, M12, 12-pin, A-coded
Cross-section	0.14 mm <sup>2</sup> (12 x)

More information / accessories	
	<a href="https://www.di-soric.com/206957">https://www.di-soric.com/206957</a>