




- Easy assembling and disassembling of the light curtain
- Easy height adjustment of the first beam
- With rear cable entry
- Robust column made of aluminum extrusion poles
- With adjustable angular orientation
- Integrated spherical spirit level to check the correct vertical column axis



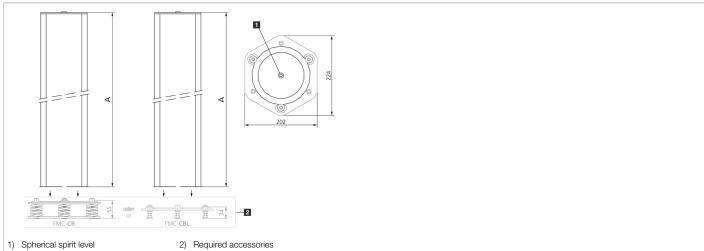

| Technical data (typ.) | |
|--------------------------------|----------------------------------------------------------------------|
| Total height (A) | 1970 mm |
| Housing material | Aluminum rod profile (Epoxy powder coating) / Plastic |
| Operating principle | Mounting column |
| Characteristics | built-in spherical spirit level |
| To be used for | all light curtains with a protected field height up to 1,810 mm |
| Features | Rear cable entry (PG11 cable gland) |
| Scope of delivery | Assembly instructions, 2 adjustable fixing brackets, Fixing material |
| | |
| More information / accessories | https://www.di-soric.com/208366 |