


**209940**  
**KLT-M3-T2-0.5**  
**Plastic fiber optics**

- Accurate detection
- Optional attachment optics
- Cutting knife included



**Function**

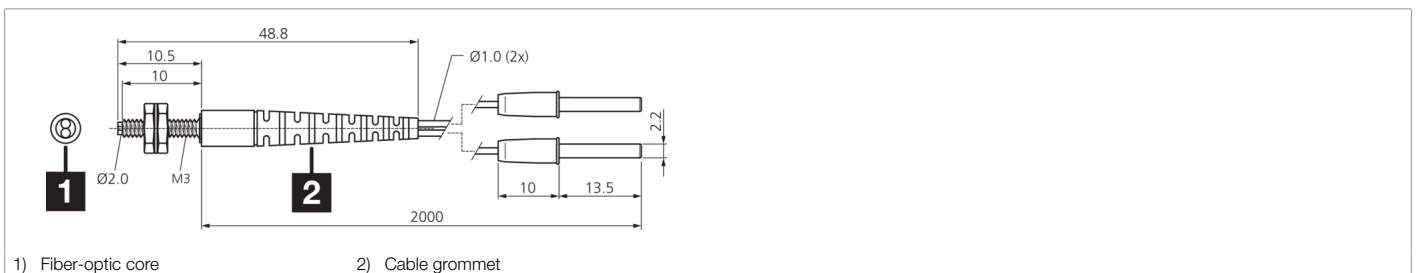

**Technical data (typ.)**

**+20°C**

Length	2,000 mm (Can be shortened)
Thread	M3
Light aperture	axial
Bending radius	> 15 mm
Fiber	Parallel, Ø 0.5 mm (2x)
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ PE (Coating)</li> </ul>
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	75 mm
Resolution	Ø 0.05 mm
Temperature resistance	-55 ... +70 °C

**More information / accessories**

<https://www.di-soric.com/209940>