


**210050**  
**MB-NP-250-K**  
**Machine lighting**

- High light intensity thanks to state-of-the art Power LEDs
- Very good color reproduction guarantees safety at the work-place (color rendering index 85)
- Long life thanks to intelligent thermal management
- High-performance LEDs with very high light intensity ensure reliable and even illumination
- High protection type IP 67
- Trigger input for external control
- Dimmable via PWM signal
- Resistant to materials such as bases, saline solutions, oils and greases
- Resistant to inundation with hot chips

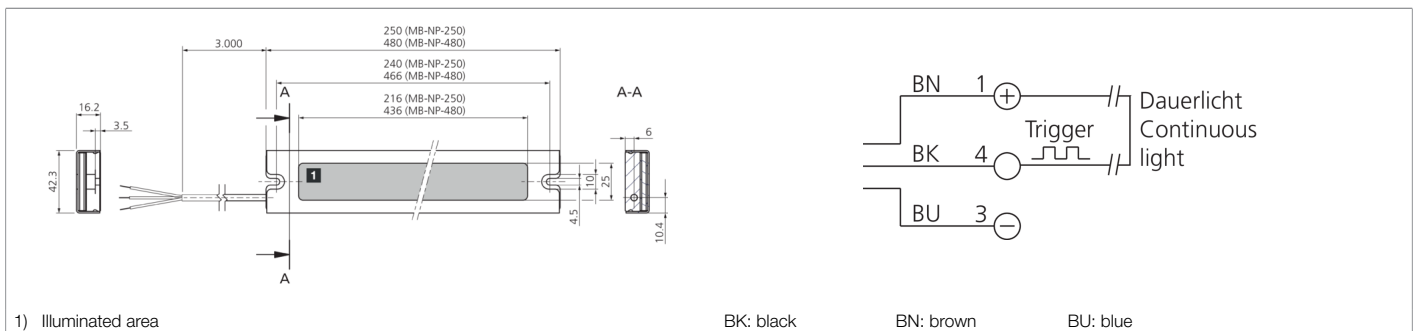

Function													

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (± 5%, Supply Class 2)
Internal power consumption	450 mA (24 V DC)
Power	10.8 W (24 V)
Inverse polarity protection	Yes
Cascadable	Not cascadable
Illuminated area	220 x 30 mm
Housing material	Aluminum
Material	<ul style="list-style-type: none"> <li>■ Safety glass ESG, diffuse (Window)</li> <li>■ V2A (Front frame)</li> </ul>
Weight	410 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Approvals	UL
Model	Machine lighting
Product series	MB-NP Protected
Trigger input high level	8.0 ... 25.2 V
Trigger input low level	< 5.0 V
Light source	LED
Energy efficiency class (VO 2019/2015)	F (A - G)
Color	White (5 000 K)
Deflection angle FWHM	120°
Color rendering index Ra	85
Light intensity	<ul style="list-style-type: none"> <li>■ 1.40 kLx (500.0 mm)</li> <li>■ 0.430 kLx (1000.0 mm)</li> </ul>
On-delay time (Trig.)	0.050 ms
Switch off delay (Trig.)	0.050 ms



**210050**  
**MB-NP-250-K**  
**Machine lighting**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 67
Connection	Cable, 3.0 m, 3-pin (flying leads), 3 x 0.34 mm <sup>2</sup>
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/210050">https://www.di-soric.com/210050</a></b>