




210070
BE-DOME100/70-G5-T4
Dome light

- Extremely homogeneous, diffuse illumination
- Very compact design
- High light intensity
- Robust design

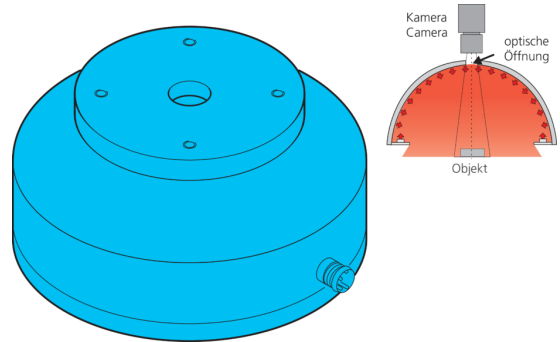

aktive Fläche / active area: 12
 freier Innendurchmesser / inner diameter / illuminated area: 70
 Ø 65
 M3 x 5 (4x)
 41
 50
 M4 / 5 tief / depth (4x)
 optische Öffnung / aperture
 Stecker M8, 4-polig / connector M8, 4-poled
 50
 Ø 100

Blick auf Anschlusseite / View on connection position

PIN	Aderfarbe / wire color	Funktion / function
3	blau / blue	- blau / blue
1	braun / brown	+ 24V

BN: brown BU: blue

Function									
								CE	UK CA

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC
Power	2.4 W (100 mA, 24 V DC)
Power consumption	100 mA
Illuminated area	Ø 70 mm
Quantity	32 (LEDs)
Diameter	Ø 100 mm (Diameter)
Housing material	Aluminum / Plastic
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Light source	LED
Color	White
Wavelength	6500 K
Deflection angle FWHM	120°
Ambient temperature during operation	0 ... +50 °C
Connection	Connector, M8, 4-pin

More information / accessories <https://www.di-soric.com/210070>