
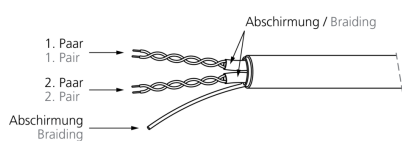


210490

MC 25

MS connecting cable RS485

- Flexible lead design
- Good stripping properties
- Shielded

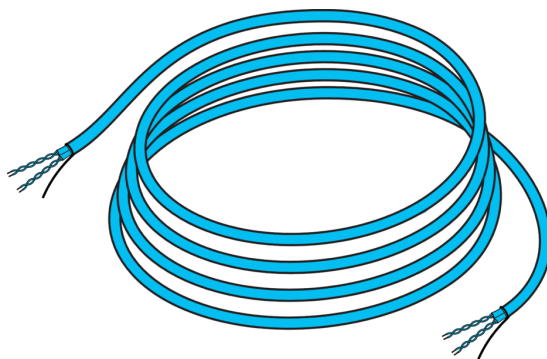

Function



Technical data (typ.)

+20°C, 24 V DC

Length	25,000 mm
Operating principle	Connecting cable RS485
Design	flying leads
Characteristics	Shielded
Application	Connection of MS-CTX interface modules
Design	Serial RS485 cable
Connection	flying leads, 5-pin (flying leads)
Connection 2	5-pin (flying leads)

More information / accessories

<https://www.di-soric.com/210490>