







**210543**  
**ID-100-IM3-2-US**  
**ID Handheld reader**

- Dual zone optic: fast and reliable decoding despite fluctuating working distances
- Able to read every kind of 1D and 2D codes – coloured and low-contrast as well as damaged ones
- Fatigue-free work due to low weight
- Read feedback by means of LED, audible sound, and vibration

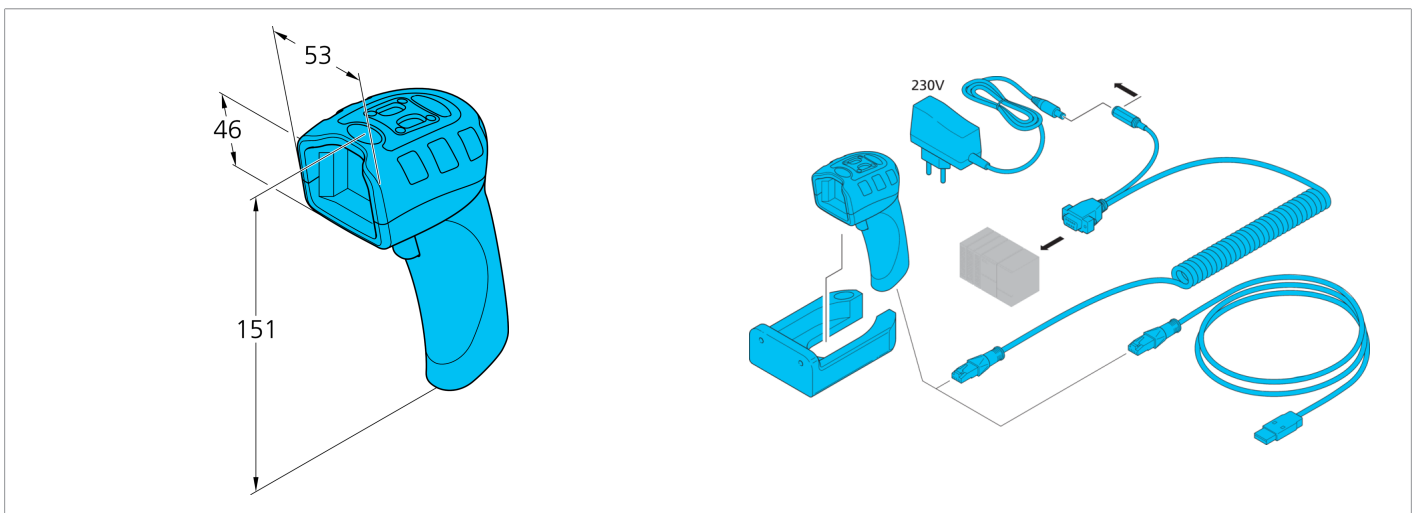

Function												
												 

Technical data (typ.)	+20°C, 5 V DC
Service voltage	5 V DC
No-load current (max.)	250 mA
Housing dimensions	151 x 46 x 53 mm
Housing height	151 mm
Housing width	53 mm
Housing material	Plastic
Weight	130 g
Note	Additional components are required for operation
Code type - 1D-Codes (barcodes)	BC 412, Code 11, Codabar, Code 128, Code 39, Code 32, Pharmacode, GS1 DataBar (RSS), Hong Kong 2 of 5, IATA 2 of 5, Interleaved 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC / EAN / JAN, UPC / EAN
Code type - 2D-Codes	Aztec Code, QR, Micro QR Code, Data Matrix (ECC 0-200), Codablock F, Han Xin, Maxi Code
Code type - Stacked codes	PDF 417, Micro PDF 417, Code 49, Codablock, GS1 Composite (CC-A/CC-B/CC-C), GS1 DataBar (Composite & Stacked)
Interface	<ul style="list-style-type: none"> <li>■ RS232 (In operation with ID-K-SD/DCJ-RJ50-2)</li> <li>■ USB (Type A operation with ID-K-RJ50/U-2)</li> </ul>
Image sensor	CMOS
Resolution	1280 x 960 Pixel
Position scanner to code	Tilt 180°, Pitch ± 65°, Skew ± 60°
Ambient temperature during operation	-20 ... +55 °C
Protection type	IP 54

 **210543**  
**ID-100-IM3-2-US**  
**ID Handheld reader**

**Technical data (typ.)**

**+20°C, 5 V DC**

Connection

RJ 45, RJ 50

**More information / accessories**

<https://www.di-soric.com/210543>