




210663
BE-DOME170/110-G1-T4
Dome light

- Extremely homogeneous, diffuse illumination
- Very compact design
- High light intensity
- Robust design

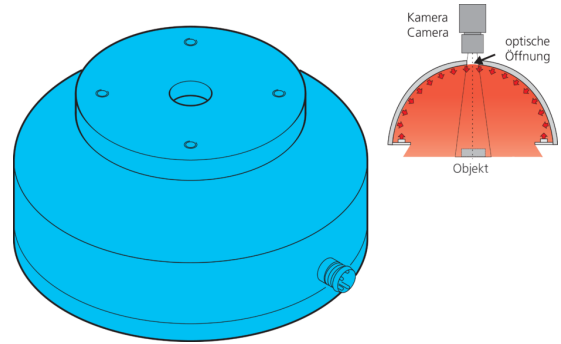

PIN	Aderfarbe wire color	Funktion function
3	blau / blue	- blau / blue
1	braun / brown	+ 24V

1) Sensing surface
 2) Free internal diameter
 3) Optical opening

4) Connector
 5) 4-pin

BN: brown BU: blue

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC
Power	3.4 W (140 mA, 24 V DC)
Power consumption	140 mA
Illuminated area	Ø 114 mm
Diameter	Ø 170 mm (Diameter)
Housing material	Aluminum / Plastic
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Light source	LED
Color	Red
Wavelength	635 nm
Deflection angle FWHM	120°
Ambient temperature during operation	0 ... +50 °C
Connection	Connector, M8, 4-pin

More information / accessories <https://www.di-soric.com/210663>