





210904

WRB 120 P-SG-4.5-2.5

Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

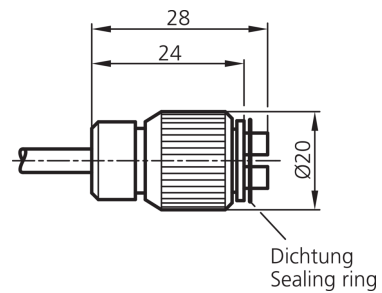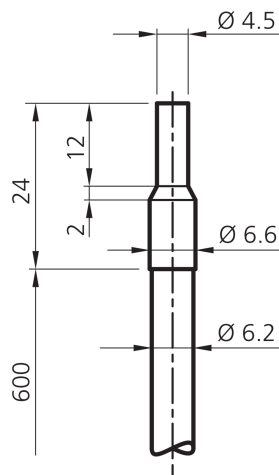

#### Technical data (typ.)

Length	600 mm
Dimension fiber bundle	Ø 2.5 mm
Light aperture	axial
Material of fiber	Glass fibers
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ PVC (Coating)</li> </ul>
Component	Glass fiber optics
Operating principle	Diffuse sensor
Operation with	VO-M12/10-4.5-2.5
Design	Cylinder
Single fiber	Ø 0.05 mm
To be used for	For operating color sensors with fiber optic connection
For FSB 10 M G1-B8	To be used
Opening angle	68°
Temperature resistance	+80 °C (temporarily up to +250 °C)
Protection type	IP 67

#### More information / accessories

<https://www.di-soric.com/210904>