


213073
USGT 30/8 I-B4
Ultrasonic fork barrier

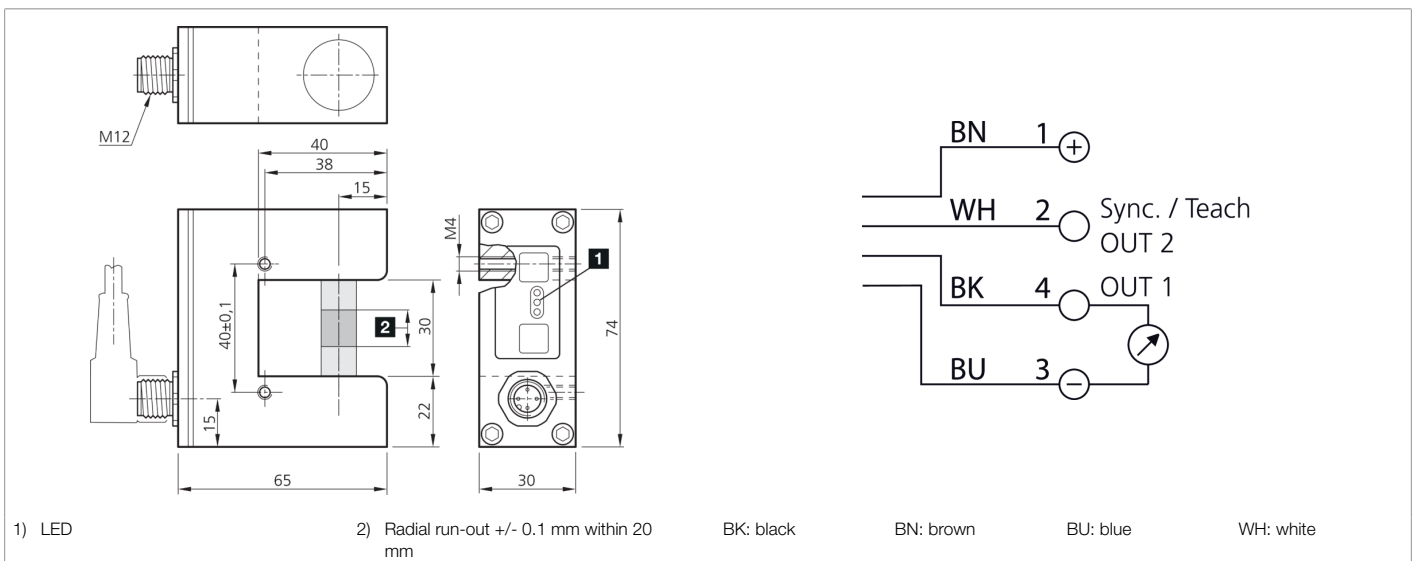

| Function | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------------|--|
| Service voltage | 8 ... 30 V DC |
| No-load current (max.) | 35 mA |
| Ripple | 10 % |
| Insulation voltage endurance | 500 V |
| Housing material | Aluminum (Black, Anodized) |
| Protection class | III, operation on protective low voltage |
| Operating principle | Ultrasonic through-beam sensor |
| Evaluation | analog |
| Design | Fork |
| Analog output | 4 ... 20 mA |
| Fork opening | 30 mm |
| Measuring range | 8 mm |
| Sensitivity adjustment | Teach button |
| Switching frequency | 500 Hz |
| Ambient temperature during operation | 0 ... +60 °C |
| Protection type | IP 67 |
| Connection | Connector, M12, 4-pin |
| Connection cable | VK ... |

More information / accessories <https://www.di-soric.com/213073>