



BEK-A400-DIF

Diffusor
Diffusor
Diffuseur

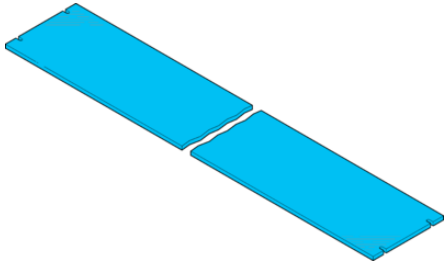

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

209999

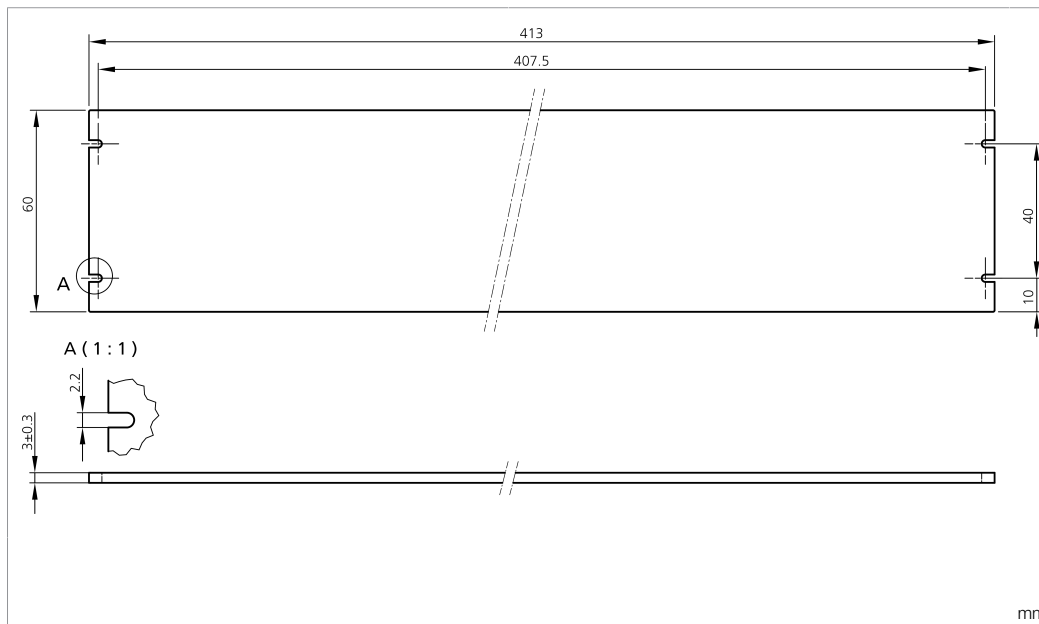

Technische Daten	Technical data	Caractéristiques techniques	+20°C, 24 V DC
Geeignet für	To be used for	Convient pour	Aufflichtbeleuchtungen BE-A400..., Aufflichtbeleuchtungen BEK-A400... / Barlights BE-A400..., Barlights BEK-A400... / Barres d'éclairage BE-A400..., Barres d'éclairage BEK-A400...
Abmessungen	Dimensions	Dimensions	60 x 413 x 3 mm
Material Filter	Material of filter	Matériau filtre	Fenster, PMMA, kratzfest beschichtet / Window, PMMA, hardcoated / Fenêtre, PMMA, revêtement résistant aux rayures


Stand 16.07.24, Änderungen vorbehalten
As of 07/16/24, subject to change
État 16.07.24, sous réserve de modifications






BEK-A400-DIF

漫射体

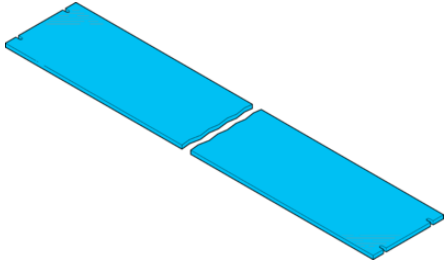

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

209999

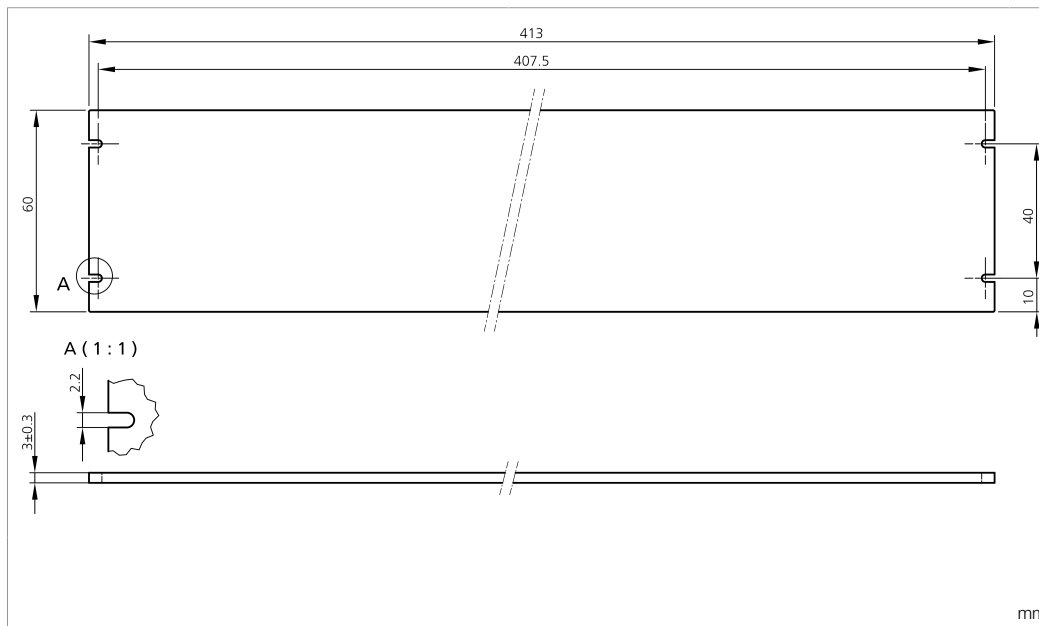

技术数据

适合用于

尺寸

滤光片材料

+20°C, 24 V DC

条形光源 BE-A400..., 条形光源 BEK-A400...

60 x 413 x 3 mm

窗口, PMMA, 防刮涂层

版本 24.07.16, 保留变更权