




200041
D7C 12 V 06 POK-IBSL
Inductive proximity sensor

- Closed, all-steel sleeve
- 3-times the standard operating distance
- Same operating distance to steel and aluminum
- Housing and sensing face made of stainless steel
- Insensitive to aggressive cleaning agents, environmental influences and hot filings
- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

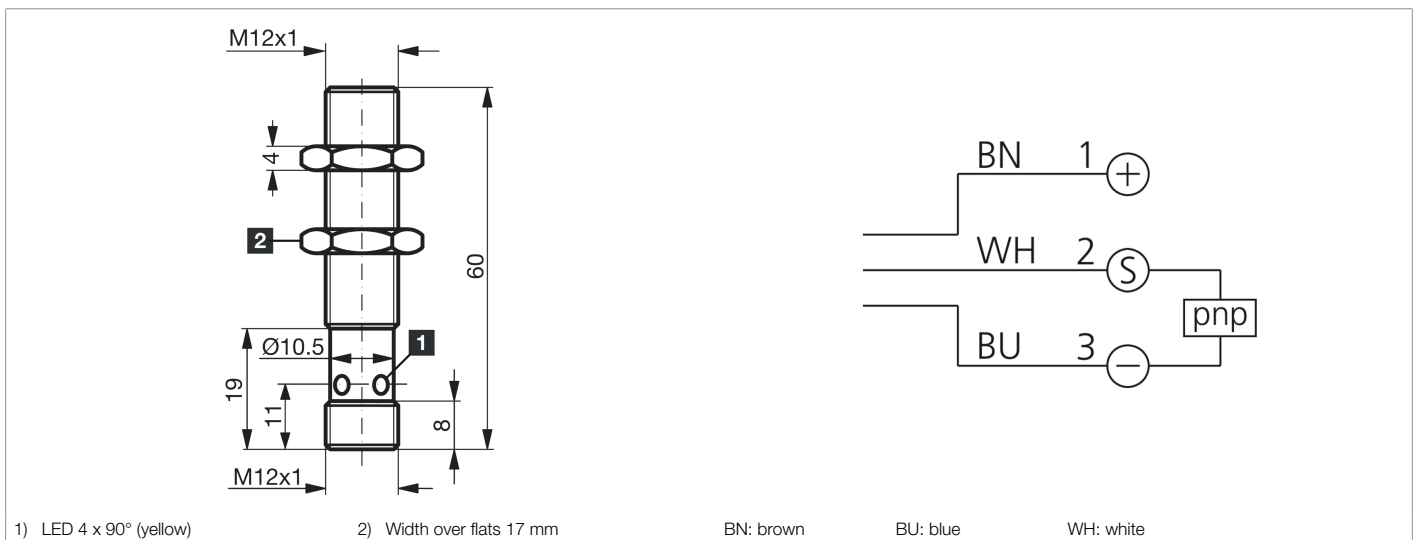

Function											
										CE	

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	< 12 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	Flush
Thread	M12 x 1
Housing length	60 mm
Housing material	Stainless steel
Tightening torque	20 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	extremely high operating distance, < 80 bar, Full-metal casing closed, pressure-resistant
Product series	INW-300 Full metal extended
Switching output	pnp, 200 mA, NC
Voltage drop (max.)	2 V
Switching distance (SN)	6 mm
Standardized measuring plate	18 x 18 x 1 mm
Switching hysteresis (max.)	15 % (5 % typ.)
Switching frequency	400 Hz



200041

D7C 12 V 06 POK-IBSL

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 68

Connection

Connector, M12, 3-pin, A-coded

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/200041>