




201239
OGU 02 N3K-TSSL
Optical label sensor

- Metal casing
- Electronics integrated
- Sensitivity is adjustable
- High switching frequency
- Light/dark switching
- Bright ring LED
- High protection type

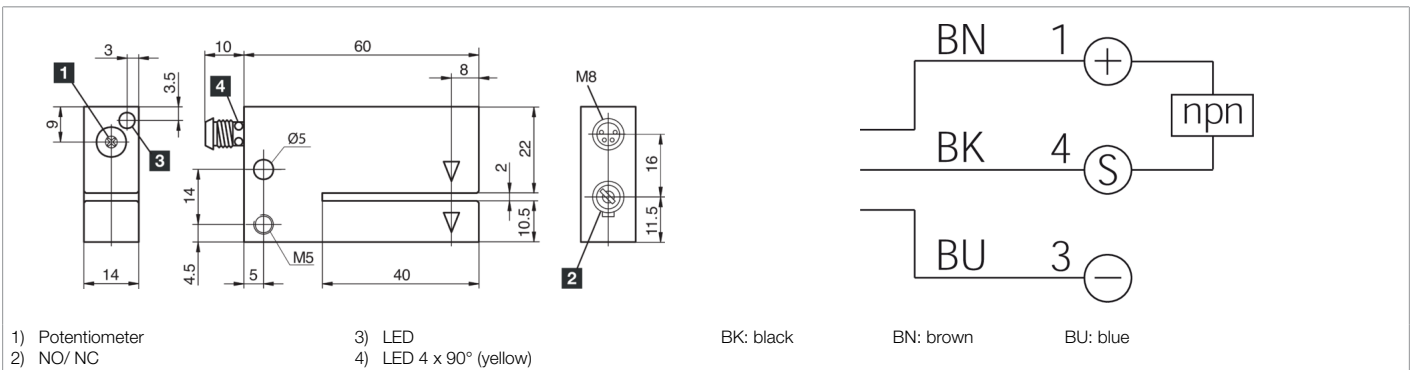

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Leg length internal	40 mm
Housing dimensions	35 x 60 x 14 mm
Housing length	60 mm
Housing height	35 mm
Housing width	14 mm
Housing material	Die-cast zinc (Black, painted)
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	digital
Design	Fork
Product series	OGUTI Optical
Switching output	npn, 200 mA, NO/NC, switchable
Voltage drop (max.)	2.8 V
Light source	LED
Color	Infrared
Wavelength	880 nm
Modulation	non-clocked
Ambient light immunity	10 kLx
Fork opening	2 mm
Switching hysteresis (max.)	0.1 mm
Sensitivity adjustment	Potentiometer



201239
OGU 02 N3K-TSSL
Optical label sensor

Technical data (typ.)	+20°C, 24 V DC
Switching frequency	10000 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/201239