




**202055**  
**WRB 210 S-8.0-2.5**  
**Glass fiber optics**

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

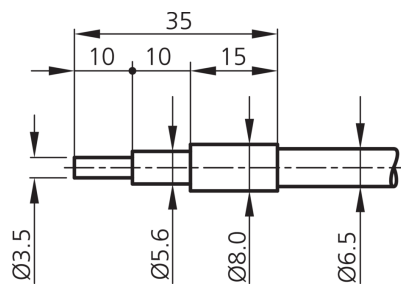

Technical data (typ.)	
Length	300 mm
Dimension fiber bundle	Ø 2.5 mm
Housing length	15 mm
Light aperture	axial
Mounting diameter	Ø 8 mm
Bending radius	> 3 x tube-Ø
Material of fiber	Glass fibers
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ Silicone-metal sleeve (Coating)</li> </ul>
Operating principle	Through-beam sensor
Design	Cylinder
Single fiber	Ø 0.05 mm
To be used for	Amplifiers for glass fiber optics
Opening angle	67°
Scanning range	1000 mm
Temperature resistance	-40 ... +180 °C (temporarily up to +250 °C)
Protection type	IP 67
More information / accessories	
	<a href="https://www.di-soric.com/202055">https://www.di-soric.com/202055</a>