




213575
BE-A130-G5-K-BS
Barlight

- Robust solid metal aluminum housing
- Variable cable outlet with strain relief
- High effectiveness due to the latest LED technology
- High efficiency due to optics with a small dispersion angle
- Optimal price-performance ratio
- Industrial-quality M12 connection
- New properties can be modeled with filter disks from the accessories
- Large assortment of mounting products available as accessories

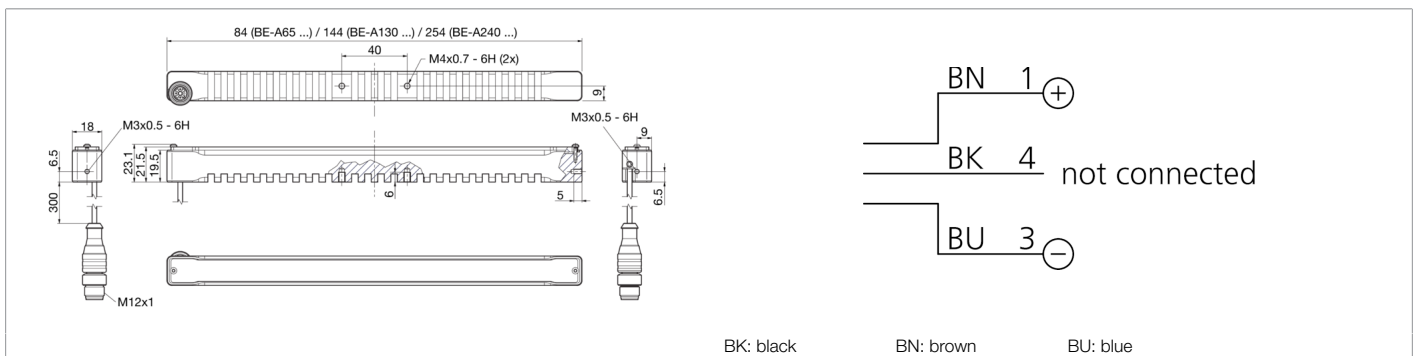

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	270 mA (24 V DC)
Power	6.5 W (24 V)
Inverse polarity protection	Yes
Illuminated area	130 x 12 mm
Housing material	Aluminum (Black, Anodized)
Material	PMMA, clear (Protection optics)
Weight	105 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Risk group 1
Approvals	UL
Design	Barlight
Operating modes	Static
Color selection	No
Light intensity can be adjusted	No
Trigger input high level	No trigger
Trigger input low level	No trigger
Trigger presets	No trigger
Interface	No
Light source	LED
Color	White
Wavelength	6500 K
Deflection angle FWHM	18°
Light intensity	<ul style="list-style-type: none"> ■ 73.0 kLx (100.0 mm) ■ 40.0 kLx (200.0 mm) ■ 10.0 kLx (500.0 mm)



213575
BE-A130-G5-K-BS
Barlight

Technical data (typ.)	+20°C, 24 V DC
Control	without power control
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 40
Connection	Pigtail, 0.3 m, M12, 3-pin
More information / accessories	https://www.di-soric.com/213575